

Кузов — Наружная отделка и молдинги

Land Rover Discovery Sport (L550) · Руководство по ремонту
Источник: lrdisc.com · разделов: 10

Содержание

- 1. Наружная отделка
- 2. Наружная отделка передний дверь нижний молдинг / снятие и установка
- 3. Наружная отделка передний крыло отделка панель / снятие и установка
- 4. Наружная отделка задний дверь нижний молдинг / снятие и установка
- 5. Наружная отделка задний спойлер
- 6. Наружная отделка задний спойлер - снятие
- 7. Наружная отделка задний спойлер - установка
- 8. Наружная отделка задний колесо Arch Liner / снятие и установка
- 9. Наружная отделка порог молдинг / снятие и установка
- 10. Наружная отделка дверь багажника молдинг / снятие и установка

Наружная отделка

Exterior trim and ornamentation

- Exterior Trim and Ornamentation Front Door Lower Moulding (G1796376) / Removal and Installation
- Exterior Trim and Ornamentation Front Fender Trim Panel (G1785263) / Removal and Installation
- Exterior Trim and Ornamentation Rear Door Lower Moulding (G1796253) /Removal and Installation
- Exterior Trim and Ornamentation Rear Spoiler (G1791772)
- Exterior Trim and Ornamentation Rear Wheel Arch Liner (G1817669) / Removal and Installation
- Exterior Trim and Ornamentation Rocker Panel Moulding (G1785265) / Removal and installation
- Exterior Trim and Ornamentation Tailgate Moulding (G1785266) / Removal and Installation

ne

Rear Bumper Cover (G1780371) / Removal and InstallationExterior Trim and Ornamentation Front Door Lower Moulding (G1796376) / Removal and Installation

ne

Наружная отделка передний дверь нижний молдинг / снятие и установка

Exterior Trim and Ornamentation Front Door Lower Moulding (G1796376) / Removal and Installation

PART(S)

STEP	REPLACE PART / RENEW PART	PART NAME
Removal Step 1	Renew Part	Retaining clips

REMOVAL

CAUTION:

Make sure to protect the paintwork.

NOTES:


- Removal steps in this procedure may contain installation details.
- RH illustration shown, LH is similar.

CAUTION:

Do not use tools during this operation, removal of the component(s) must be carried out by hand.

NOTE:

Discard the retaining clips.

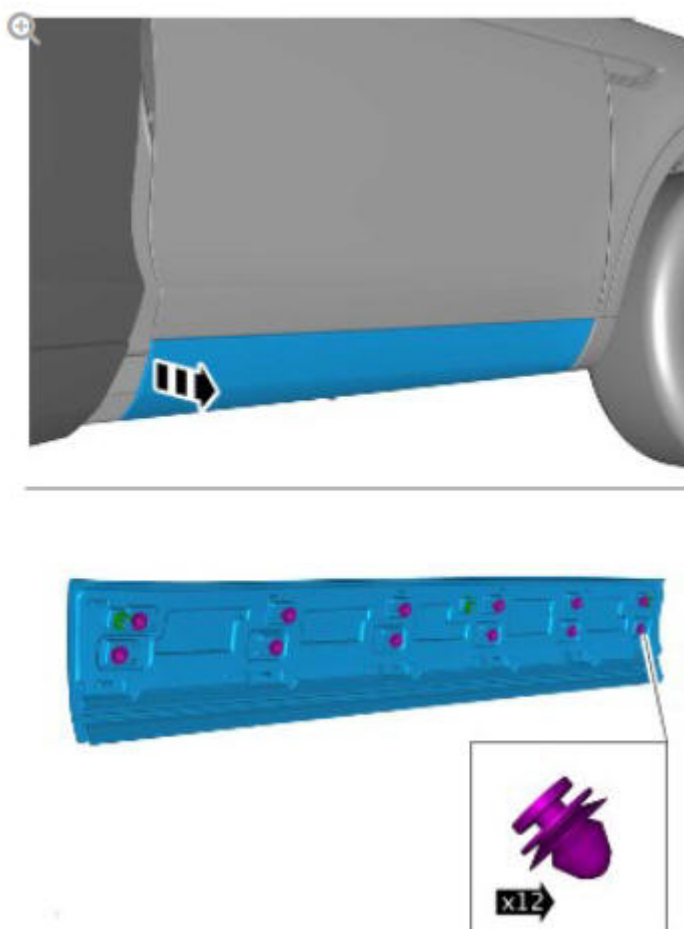

Renew Part: Retaining clips.

INSTALLATION

NOTE:

Use new retaining clips.

1. To install, reverse the removal procedure.

Exterior trim and ornamentation front fender moulding (G1655196) removal and installation

REMOVAL

CAUTION:

Make sure to protect the paintwork.


NOTE:

Removal steps in this procedure may contain installation details.

1. Refer to: Wheel and Tire (204-04 Wheels and Tires, Removal and Installation).

CAUTION:

Do not use tools during this operation, removal of the component(s) must be carried out by hand

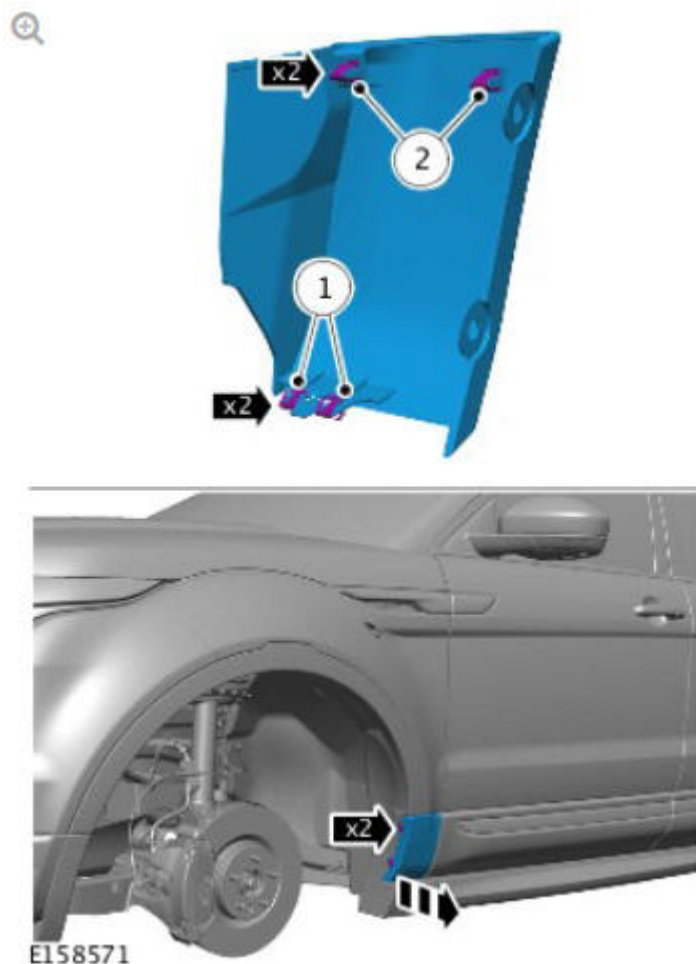

INSTALLATION

1. To install, reverse the removal procedure.

ne

Exterior trim and ornamentationExterior Trim and Ornamentation Front Fender Trim Panel (G1785263) / Removal and Installation

ne

Наружная отделка передний крыло отделка панель / снятие и установка

Exterior Trim and Ornamentation Front Fender Trim Panel (G1785263) / Removal and Installation

REMOVAL



CAUTIONS:

- Make sure to protect the paintwork.
- LH illustration shown, RH is similar.
- Using a suitable tool, release the trim panel.

NOTE:

Removal steps in this procedure may contain installation details.

1. Refer to: Wheel and Tire (204-04, Removal and Installation).

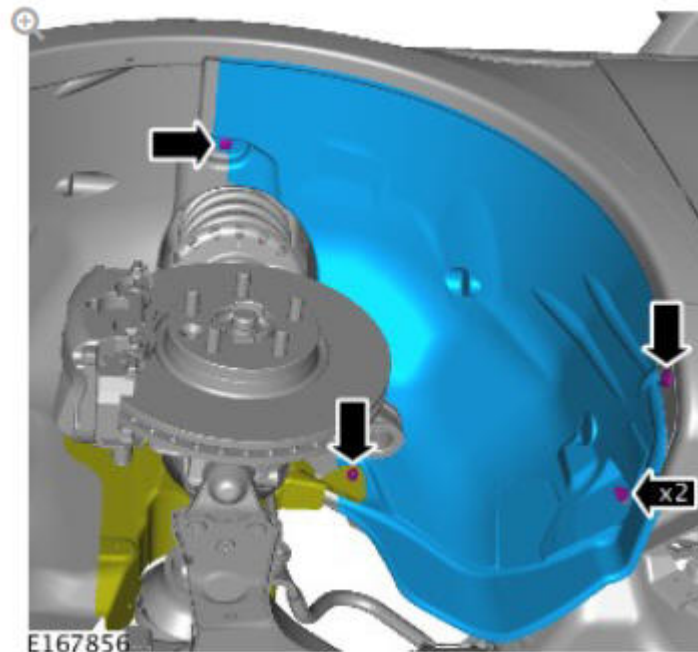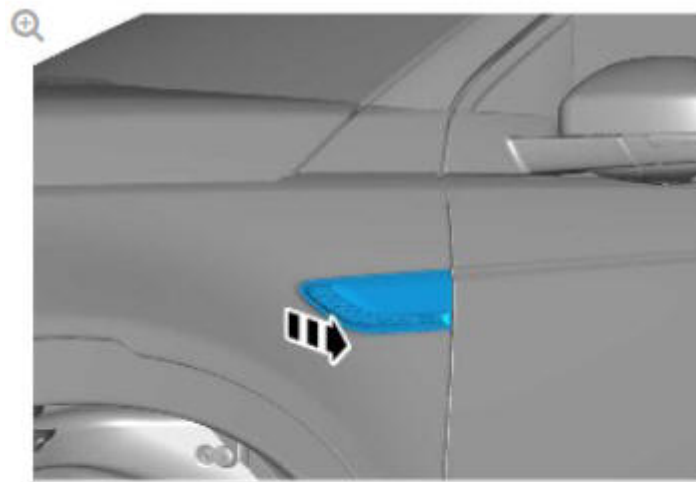

INSTALLATION

1. To install, reverse the removal procedure.

Exterior trim and ornamentation hood badge (G1791771) removal and installation

REMOVAL

CAUTION:

Remove any excessive adhesive from the hood.


1. Using a suitable tool or plastic spatula, remove the hood badge(s).

INSTALLATION

1. Clean the area prior to installation of the hood badge.

CAUTION:

Using the centre of the grill as a starting point, install the hood badge to the dimensions shown.

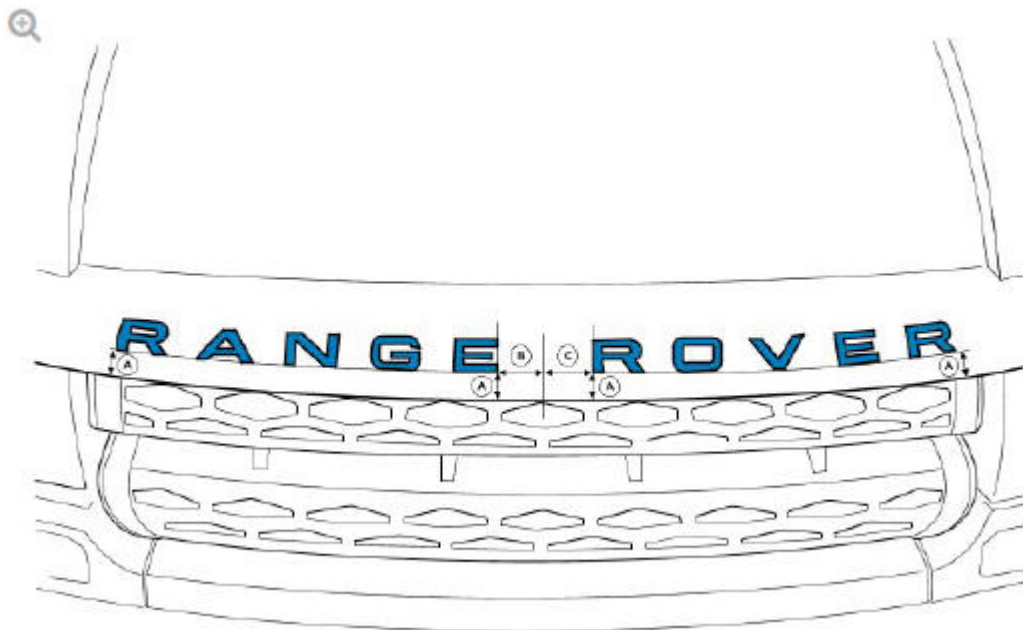

1. A - 25 mm / 0.9 inch
2. B - 40 mm / 1.6 inch
3. C - 50 mm / 1.9 inch

ne

Exterior Trim and Ornamentation Front Door Lower Moulding (G1796376) / Removal and Installation
Exterior Trim and Ornamentation Rear Door Lower Moulding (G1796253) /Removal and Installation

ne

Наружная отделка задний дверь нижний молдинг / снятие и установка

Exterior Trim and Ornamentation Rear Door Lower Moulding (G1796253) /Removal and Installation

PART(S)

STEP	REPLACE PART / RENEW PART	PART NAME
Removal Step 1	Renew Part	Retaining clips

REMOVAL

CAUTION:

Make sure to protect the paintwork.

NOTES:


- Removal steps in this procedure may contain installation details.
- RH illustration show LH is similar.

CAUTION:

Do not use tools during this operation, removal of the component(s) must be carried out by hand.

NOTE:

Discard the retaining clips.

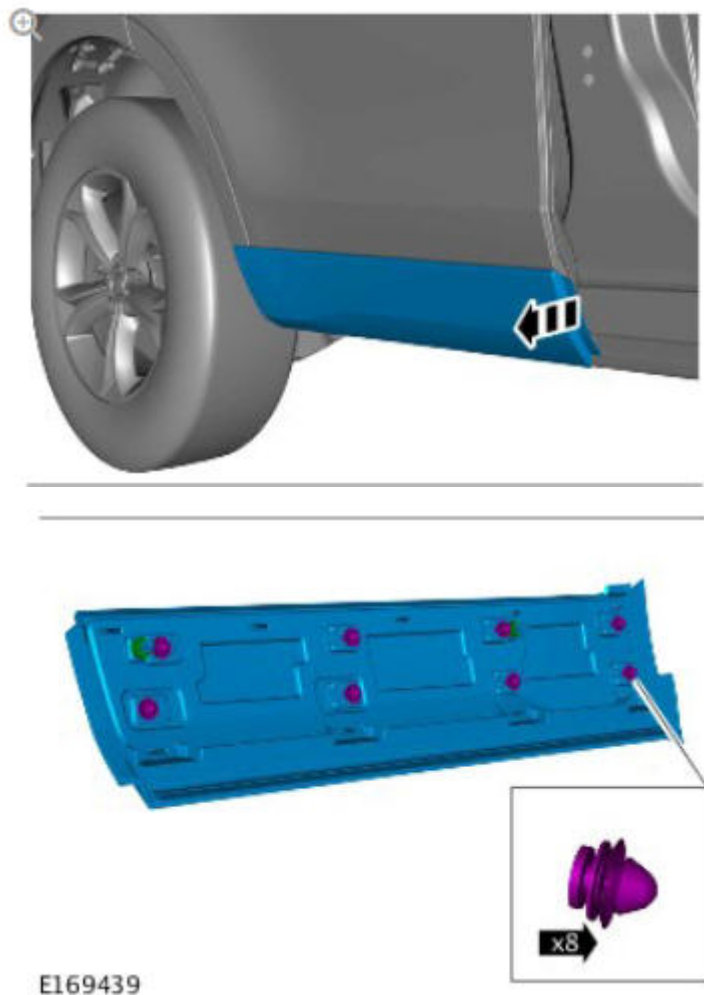

E169439

Open the front door.

Renew Part: Retaining clips.

INSTALLATION

NOTE:

Use new retaining clips.

To install, reverse the removal procedure.

ne

Exterior Trim and Ornamentation Front Fender Trim Panel (G1785263) / Removal and Installation
Exterior Trim and Ornamentation Rear Spoiler (G1791772)

ne

Наружная отделка задний спойлер

Exterior Trim and Ornamentation Rear Spoiler (G1791772)

- Exterior Trim and Ornamentation Rear Spoiler (G1791772) - Removal
- Exterior Trim and Ornamentation Rear Spoiler (G1791772) - Installation

ne

Exterior Trim and Ornamentation Rear Door Lower Moulding (G1796253) /Removal and Installation
Exterior Trim and Ornamentation Rear Spoiler (G1791772) - Removal

ne

Наружная отделка задний спойлер - снятие


Exterior Trim and Ornamentation Rear Spoiler (G1791772) - Removal

Removal

CAUTIONS:

- **Make sure to protect the paintwork.**
- **Make sure that all openings are sealed. Use new blanking caps.**

1. Refer to: High Mounted Stoplamp (417-01, Removal and Installation).

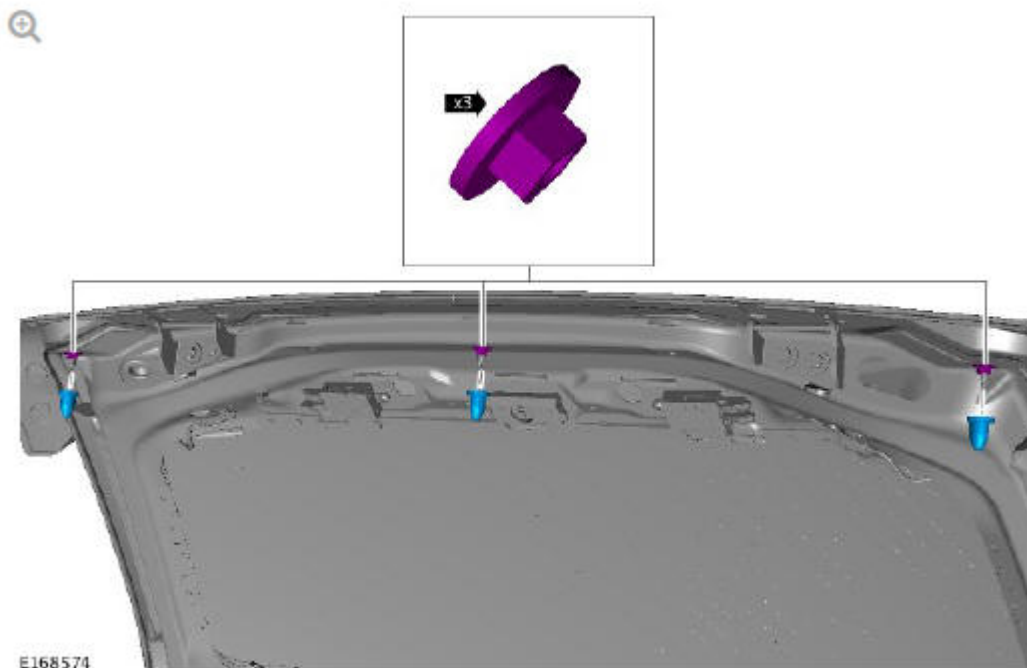


CAUTION:

Do not use tools during this operation, removal of the component(s) must be carried out by hand.

NOTE:

Discard the retaining clips.

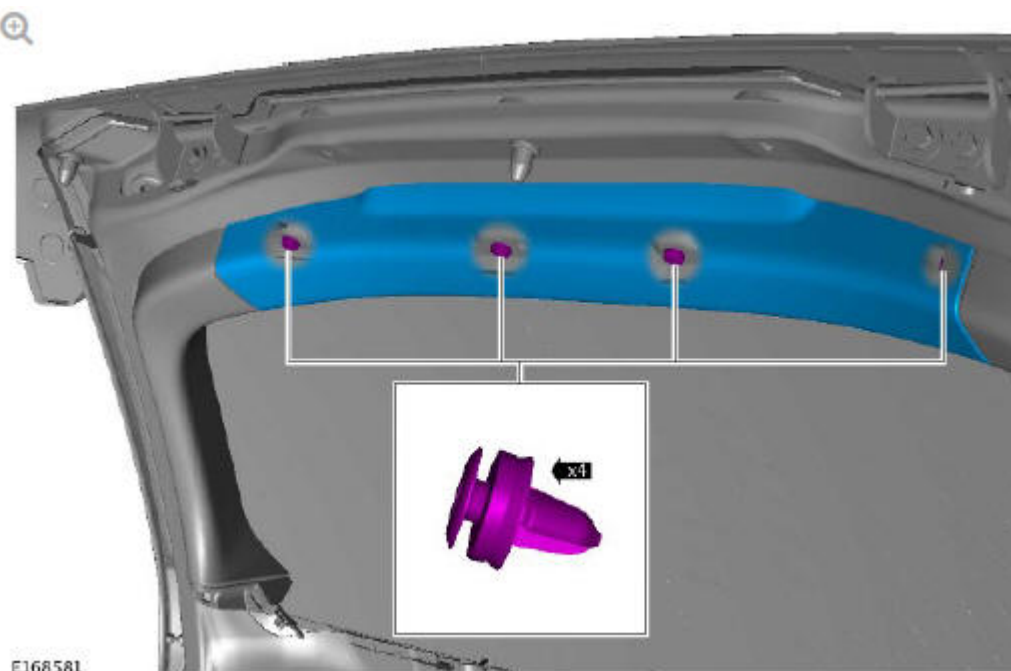


CAUTION:

Do not use tools during this operation, removal of the component(s) must be carried out by hand.

NOTE:

Discard the retaining clips.

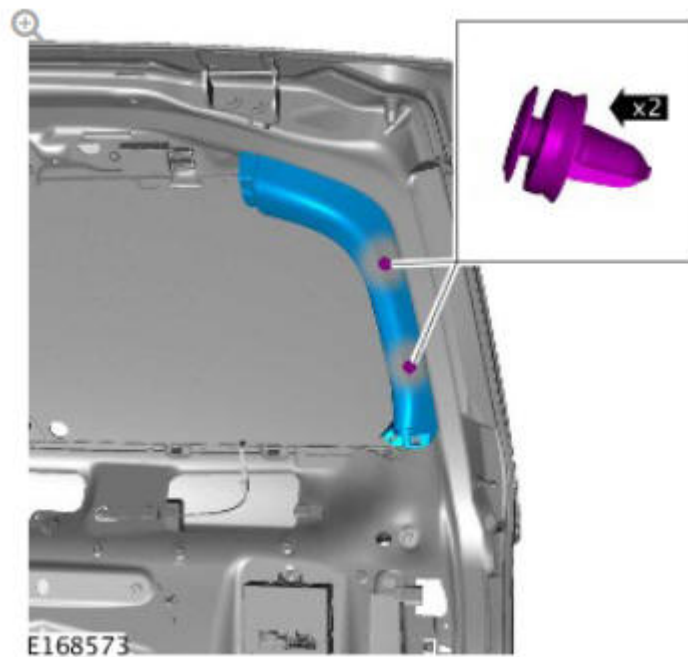




CAUTION:

Do not use tools during this operation, removal of the component(s) must be carried out by hand.

NOTE:

Discard the retaining clips.

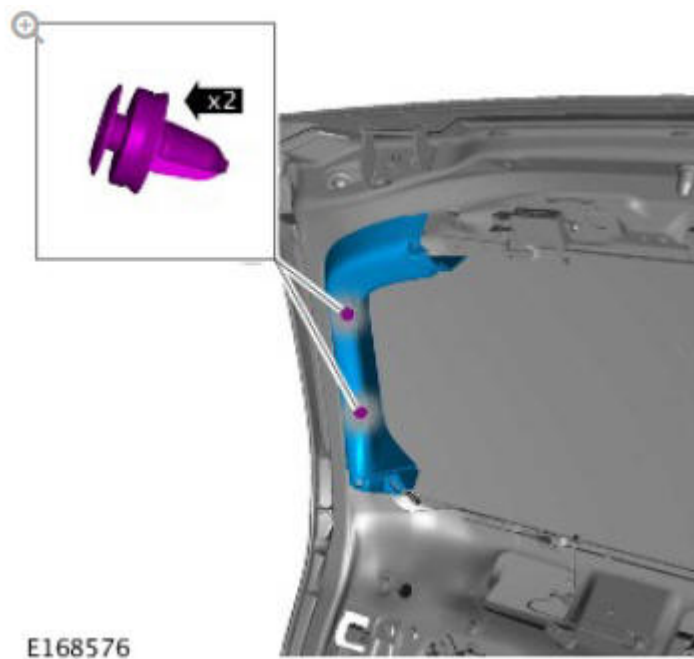


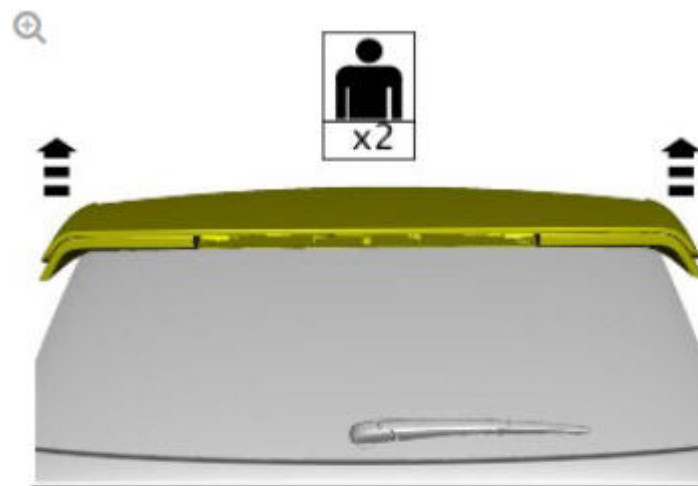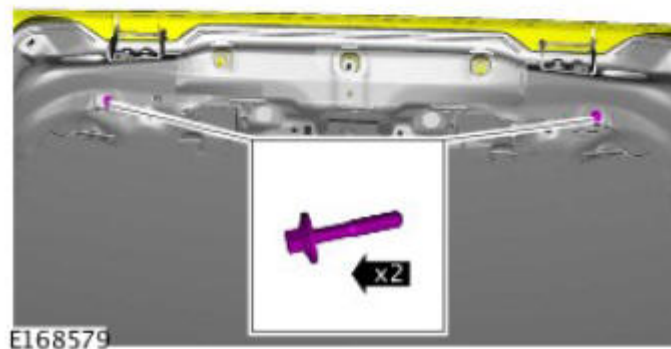



E168579

NOTE:

Position cloth to collect fluid spillage.

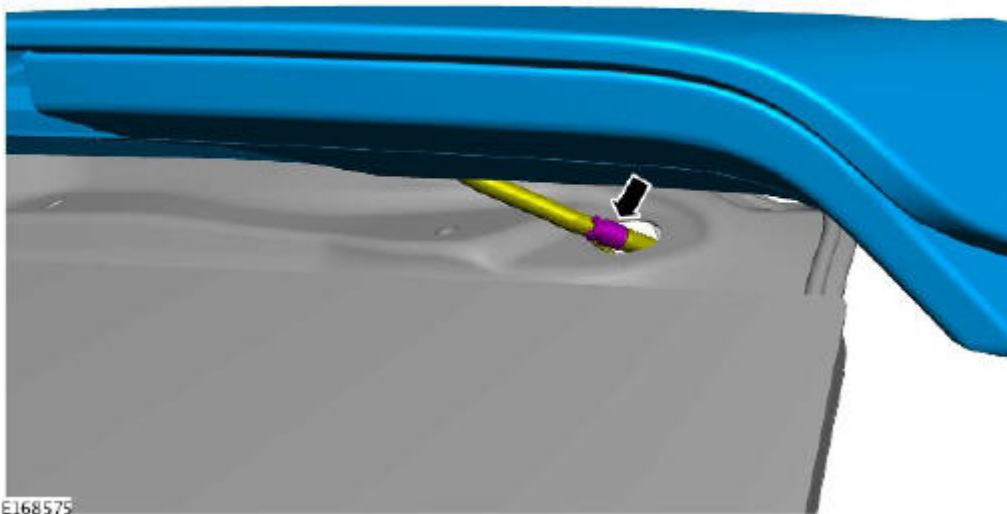

E168575

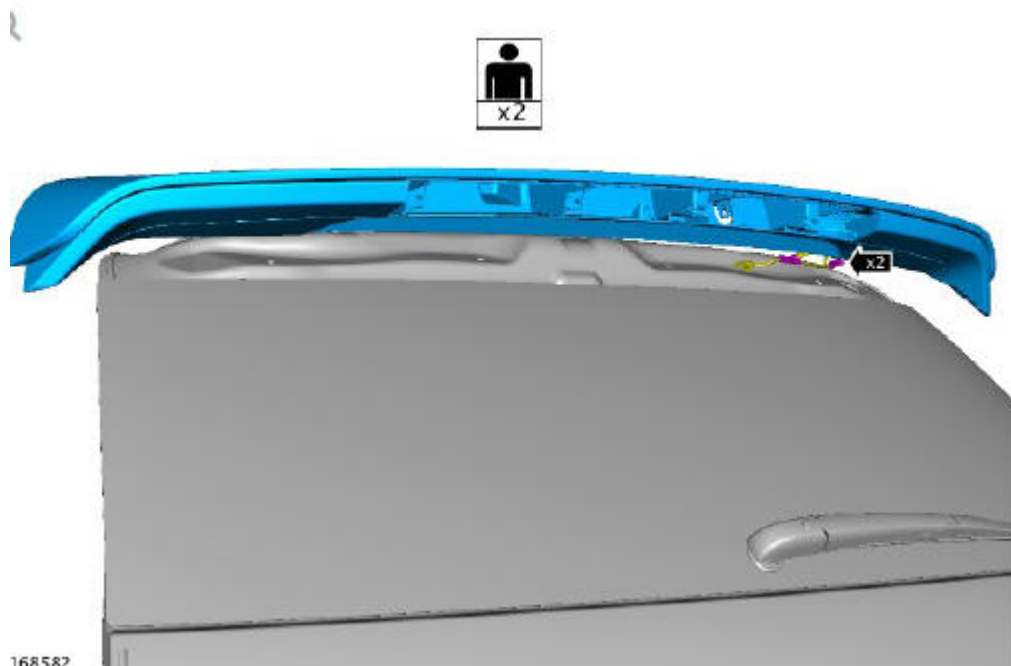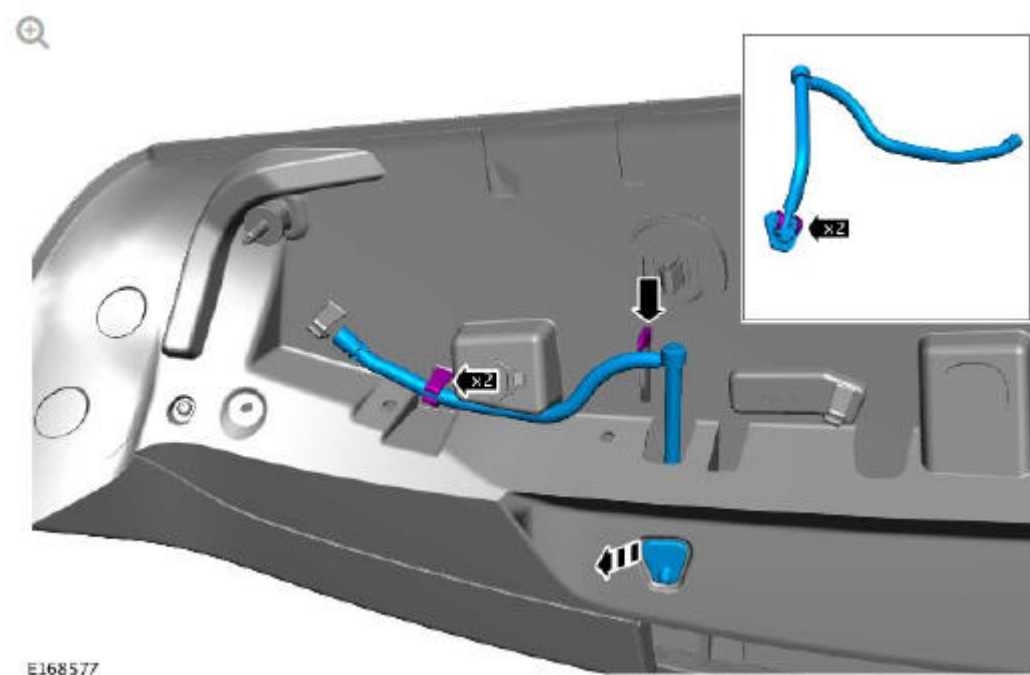

ne


Exterior Trim and Ornamentation Rear Spoiler (G1791772) Exterior Trim and Ornamentation Rear Spoiler (G1791772) - Installation

ne

Наружная отделка задний спойлер - установка

Exterior Trim and Ornamentation Rear Spoiler (G1791772) - Installation


Installation

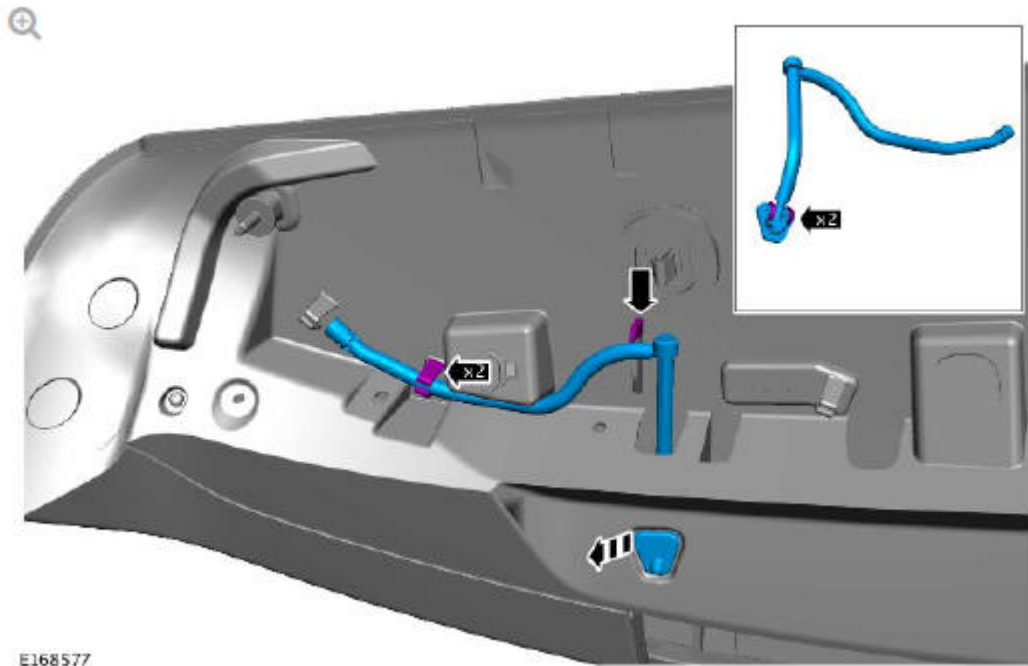


E168577

NOTE:

Position cloth to collect fluid spillage.

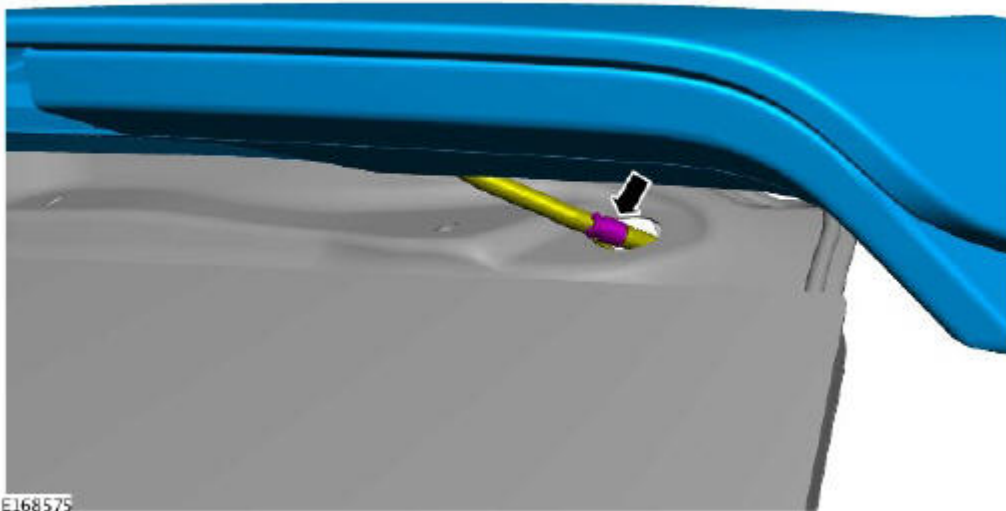


E168575

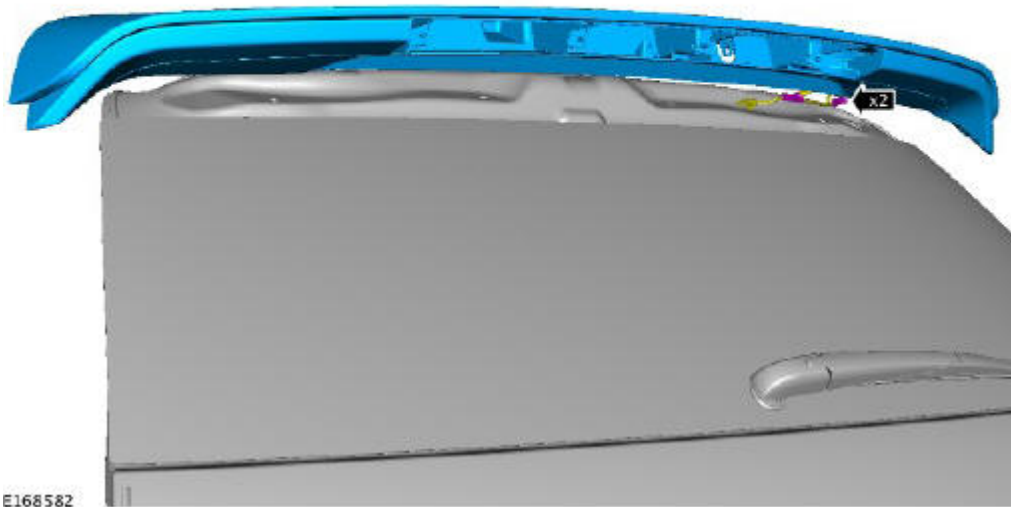

E168582

CAUTION:


Only tighten the bolts finger-tight at this stage.

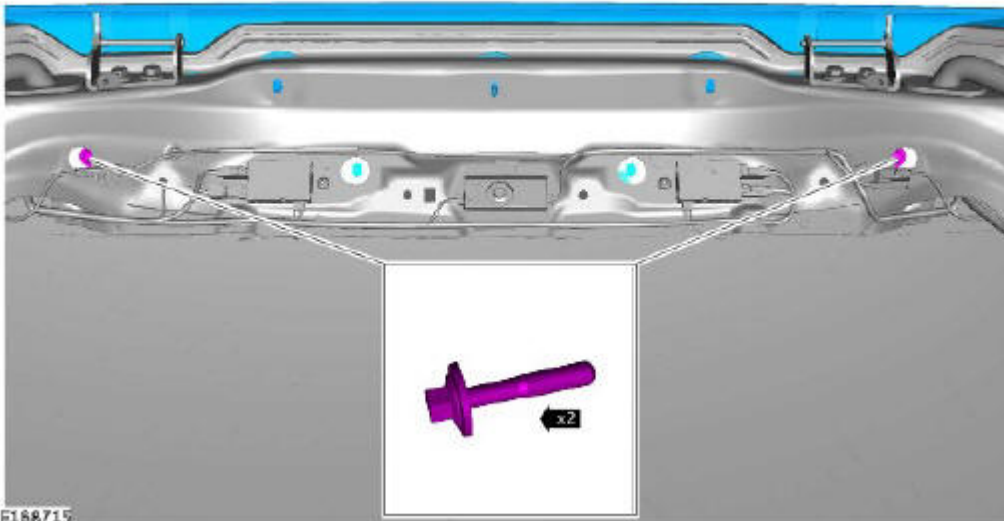

E168715


CAUTION:


Only tighten the nuts finger-tight at this stage.

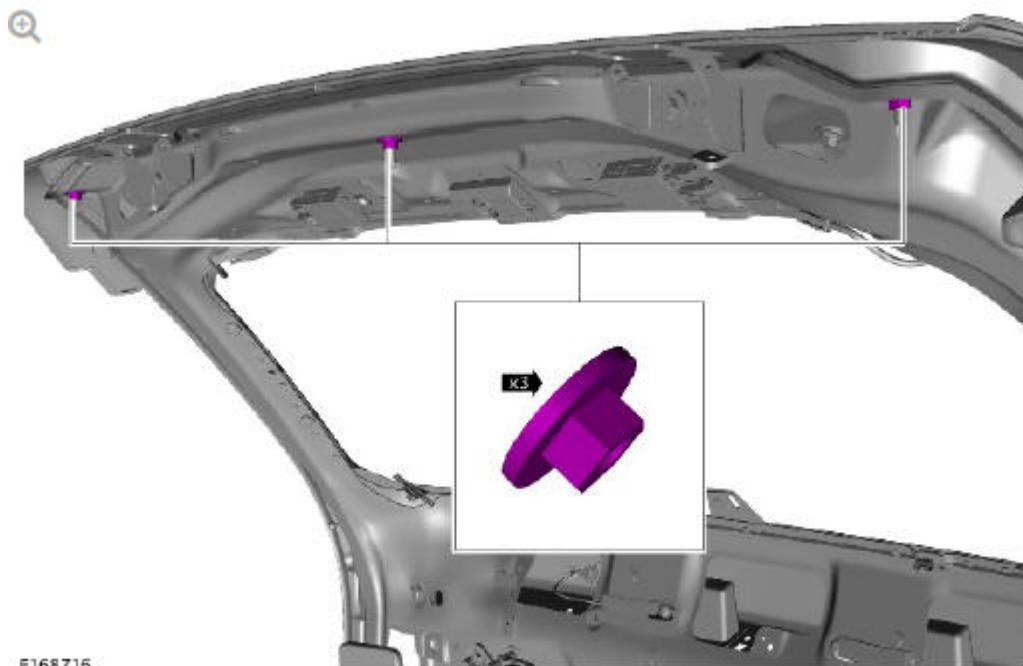

CAUTION:

Make sure that the gap is even between the rear spoiler and the rear quarter panel moulding and the rear spoiler is flush with the roof.

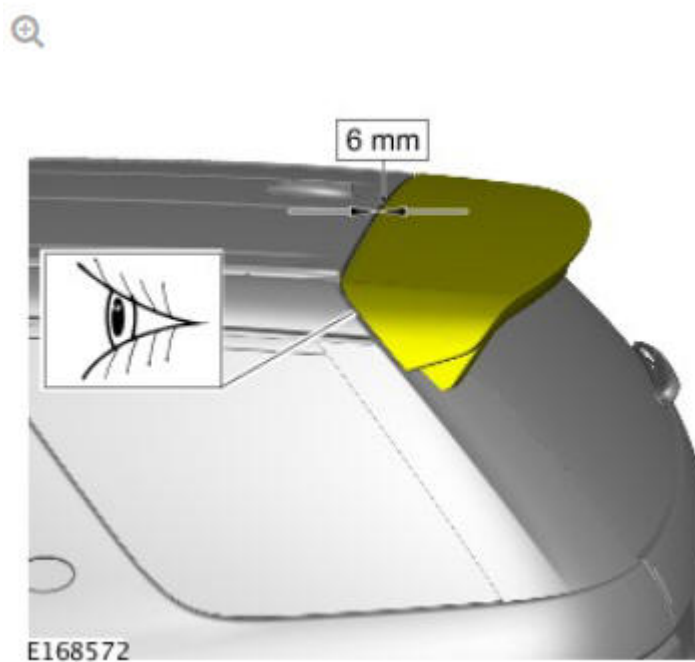


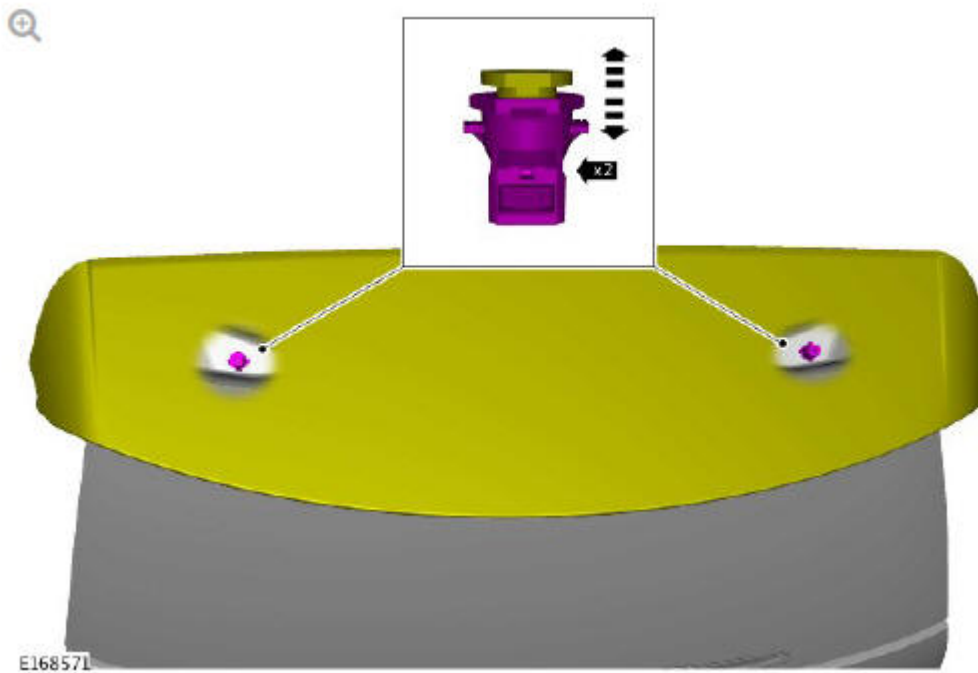


Adjust the rear spoiler by rotating the adjustment studs clockwise and counter clockwise as necessary.


CAUTION:

Make sure that the gap is even between the rear spoiler and the rear quarter panel moulding and the rear spoiler is flush with the roof

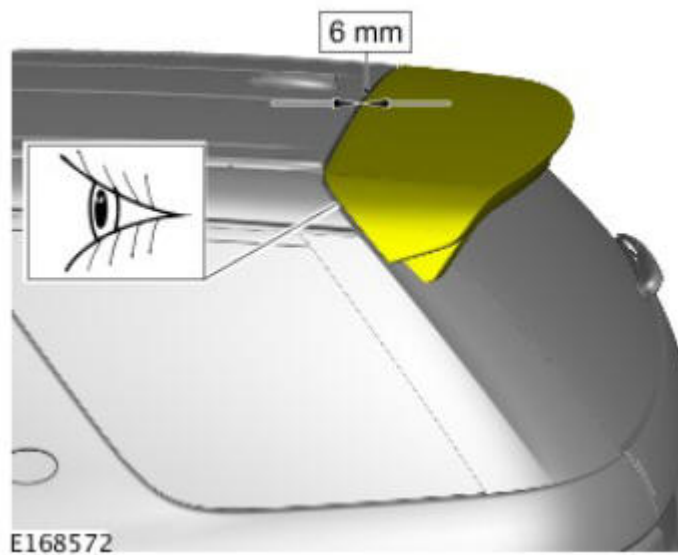

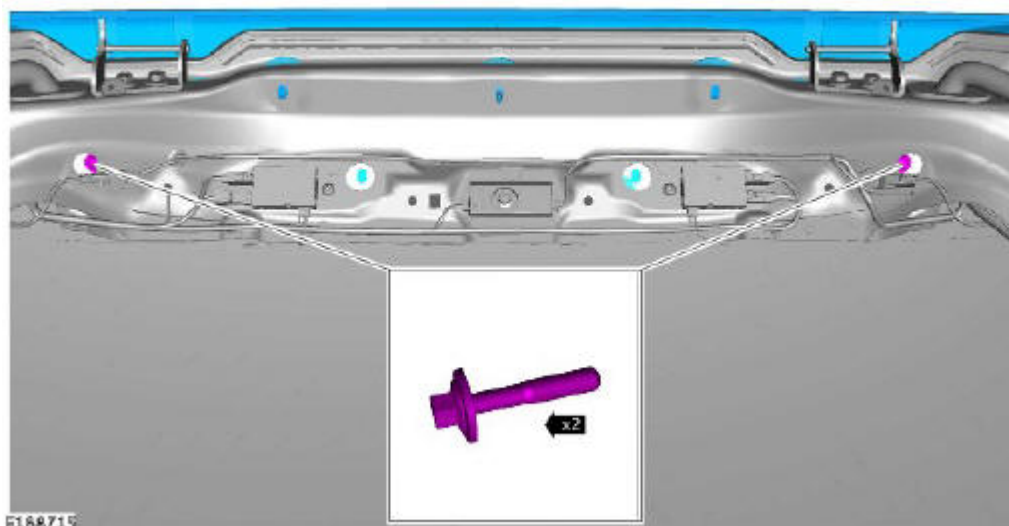

Torque: 3.2 Nm

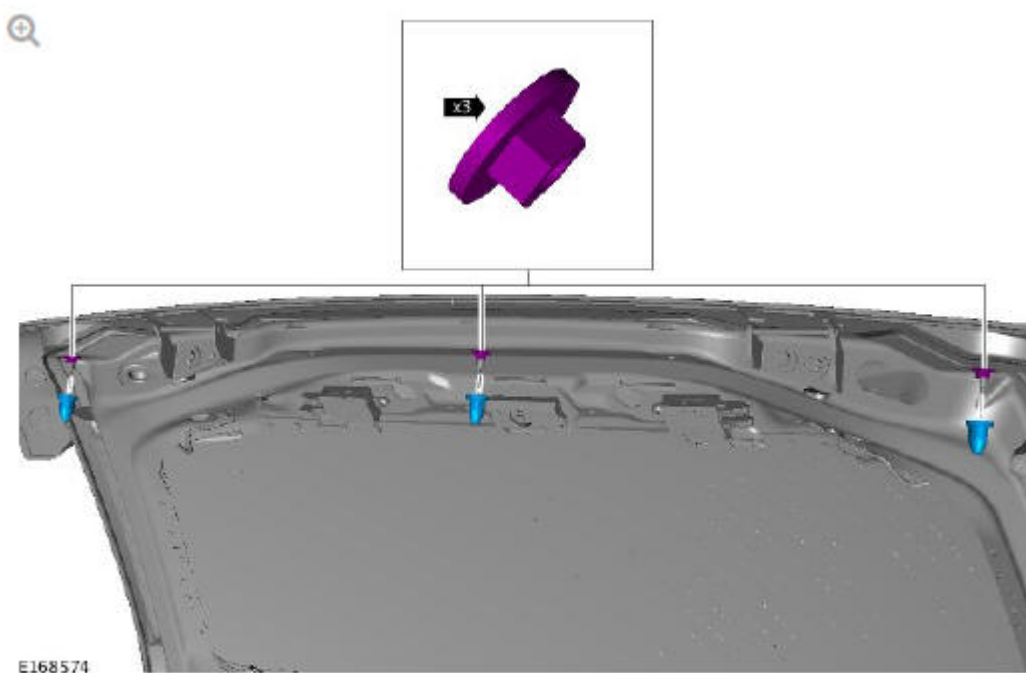

Torque: 10 Nm

To install, reverse the removal procedure.

ne

Exterior Trim and Ornamentation Rear Spoiler (G1791772) - Removal
Exterior Trim and Ornamentation Rear Wheel Arch Liner (G1817669) / Removal and Installation

ne

Наружная отделка задний колесо Arch Liner / снятие и установка

REMOVAL

CAUTION:

LH illustration shown, RH is similar.

NOTE:

Removal steps in this procedure may contain installation details.

WARNING:

Make sure to support the vehicle with axle stands.



1. Raise and support the vehicle.
2. Refer to: Wheel and Tire (204-04, Removal and Installation).

CAUTION:

Take extra care not to damage the component.



NOTE:

The step must be carried out on both sides.

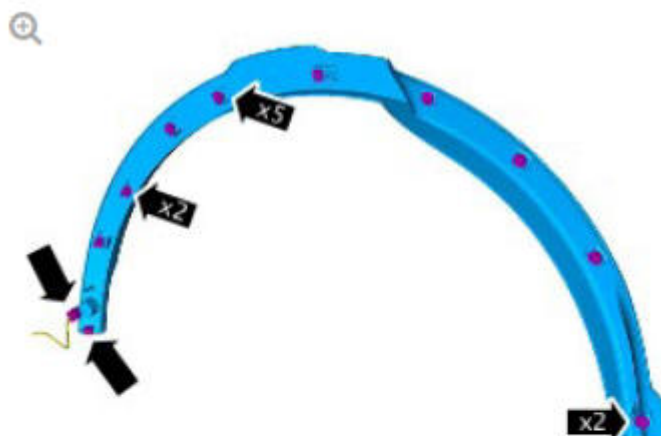
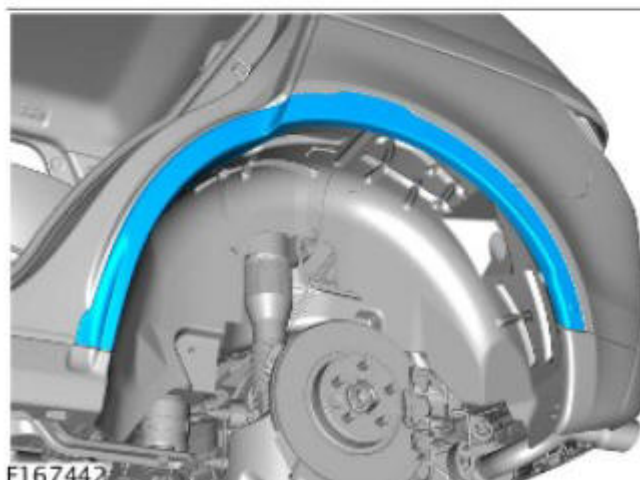


NOTE:

The step must be carried out on both sides.

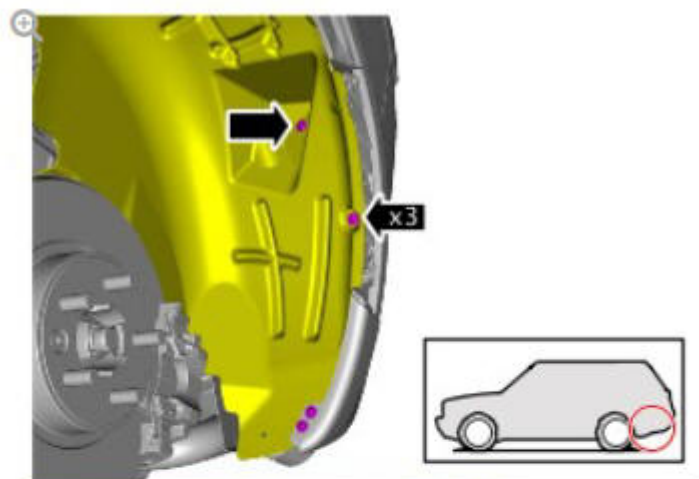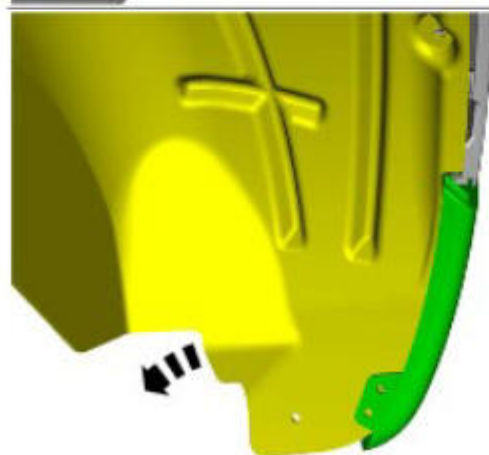

E167449

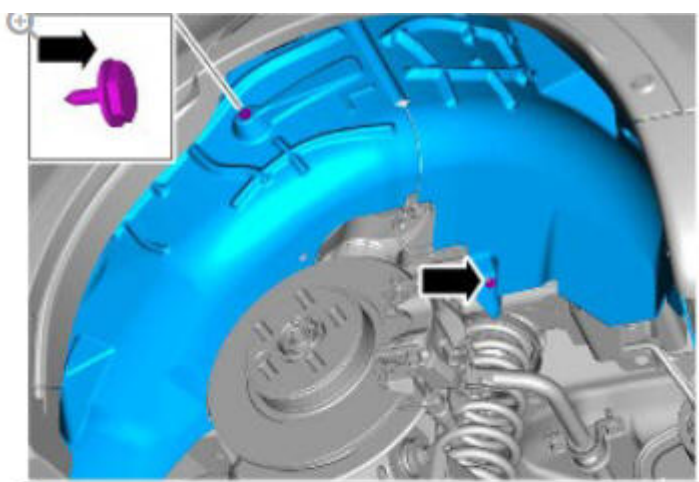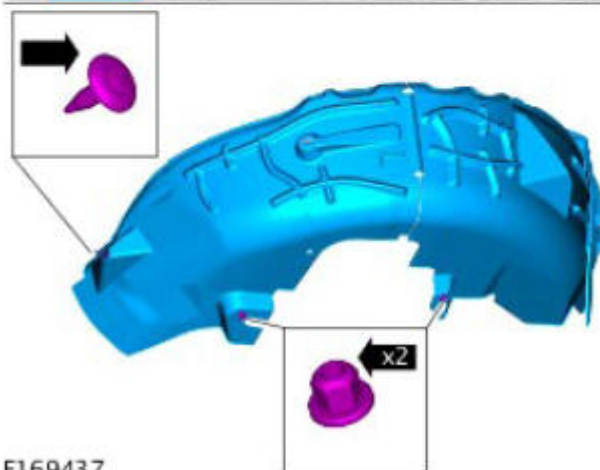

E169437

INSTALLATION

1. To install, reverse the removal procedure.

ne

Exterior Trim and Ornamentation Rear Spoiler (G1791772) - Installation
Exterior Trim and Ornamentation
Rocker Panel Moulding (G1785265) / Removal and installation

ne

Наружная отделка порог молдинг / снятие и установка

Exterior Trim and Ornamentation Rocker Panel Moulding (G1785265) / Removal and installation

REMOVAL

CAUTION:

Make sure to protect the paintwork.

NOTES:


- Removal steps in this procedure may contain installation details.
- RH illustration shown, LH is similar.


CAUTION:

Use a suitable trim tool.

NOTE:

Turn the steering wheel to full RH lock

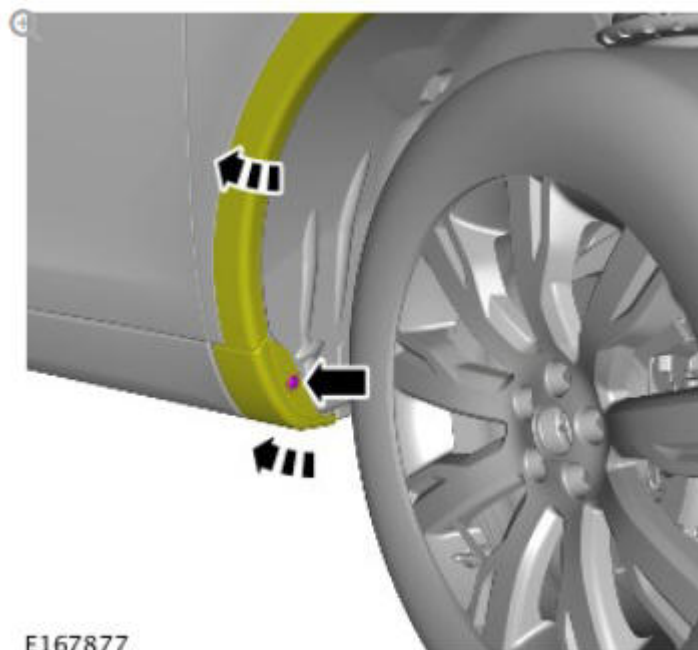


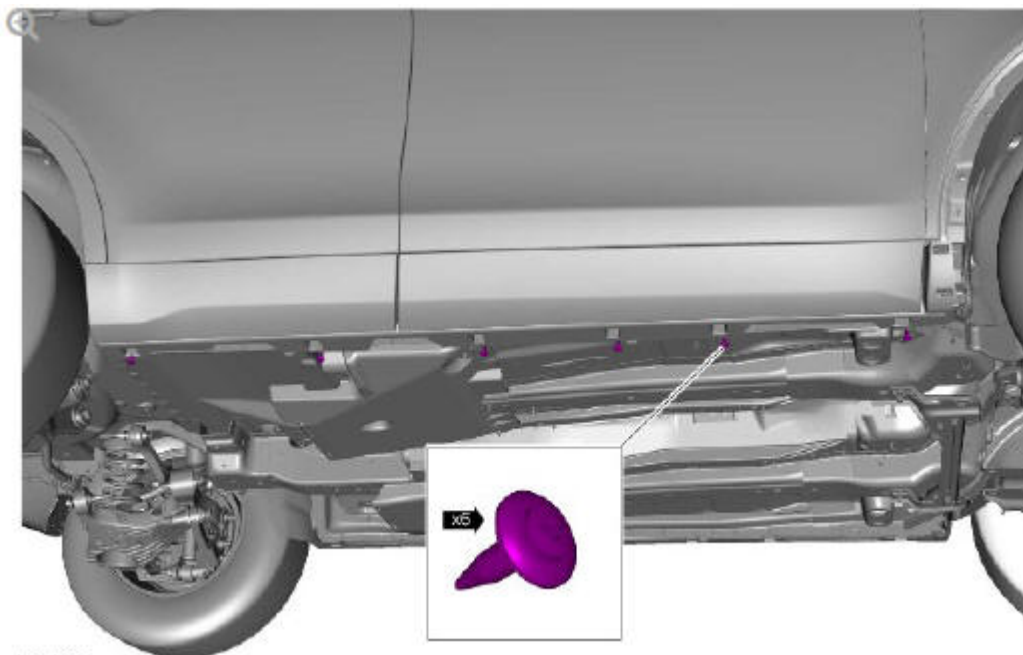


CAUTION:

Using a suitable plastic trim tool, release the clips.

NOTE:

Discard the retaining clips.

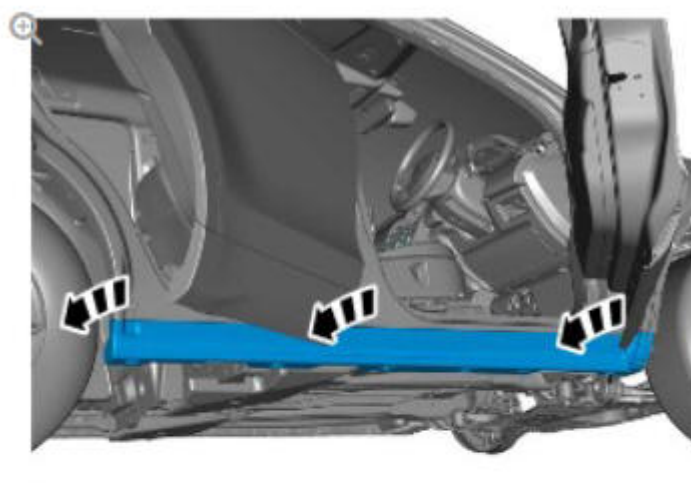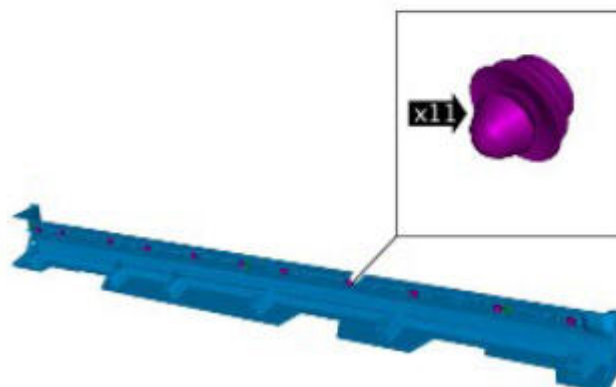

Renew Part: Retaining clips.

INSTALLATION

NOTE:

Install new retaining clips.

1. To install, reverse the removal procedure.

Exterior trim and ornamentation roof moulding (G1785264) removal and installation

REMOVAL

CAUTION:


Do not use tools during this operation, removal of the component(s) must be carried out by hand.

NOTE:

RH illustration shown, LH is similar.

NOTE:

Carefully peel off the finisher from the roof without bending the free length more than 30deg.

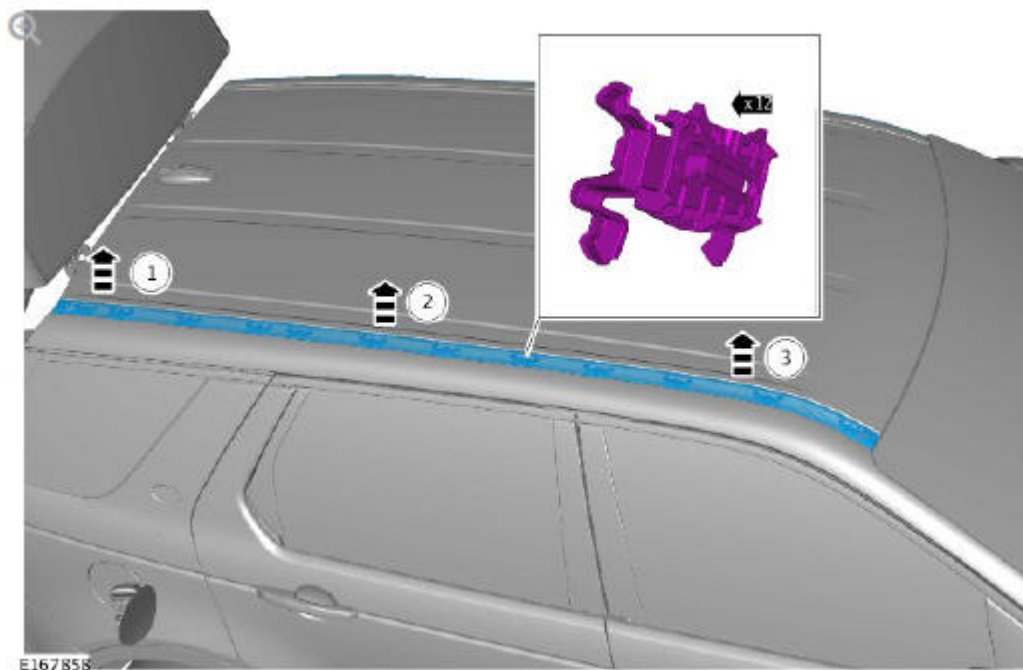


Open the liftgate.

INSTALLATION

NOTE:

Install new retaining clips.

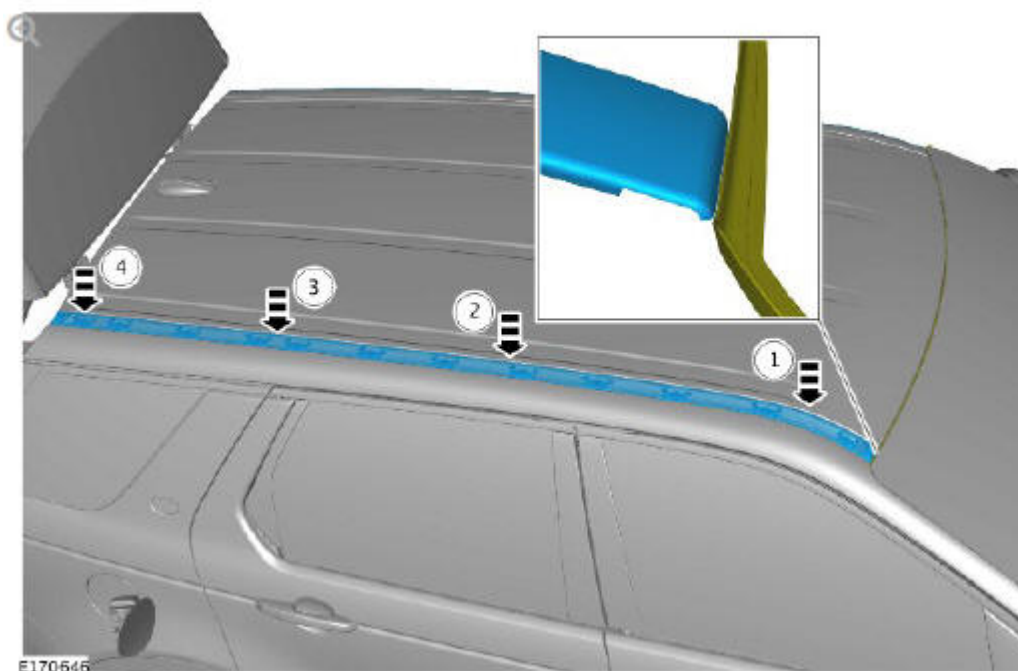

Open the liftgate.

ne

Exterior Trim and Ornamentation Rear Wheel Arch Liner (G1817669) / Removal and Installation
Exterior Trim and Ornamentation Tailgate Moulding (G1785266) / Removal and Installation

ne

Наружная отделка дверь багажника молдинг / снятие и установка

Exterior Trim and Ornamentation Tailgate Moulding (G1785266) / Removal and Installation

REMOVAL


CAUTIONS:

- **Make sure to protect the paintwork.**
- **Do not use tools during this operation, removal of the component(s) must be carried out by hand.**

NOTE:

Removal steps in this procedure may contain installation details.

1. Refer to: Parking Aid Camera (413-13, Removal and Installation).

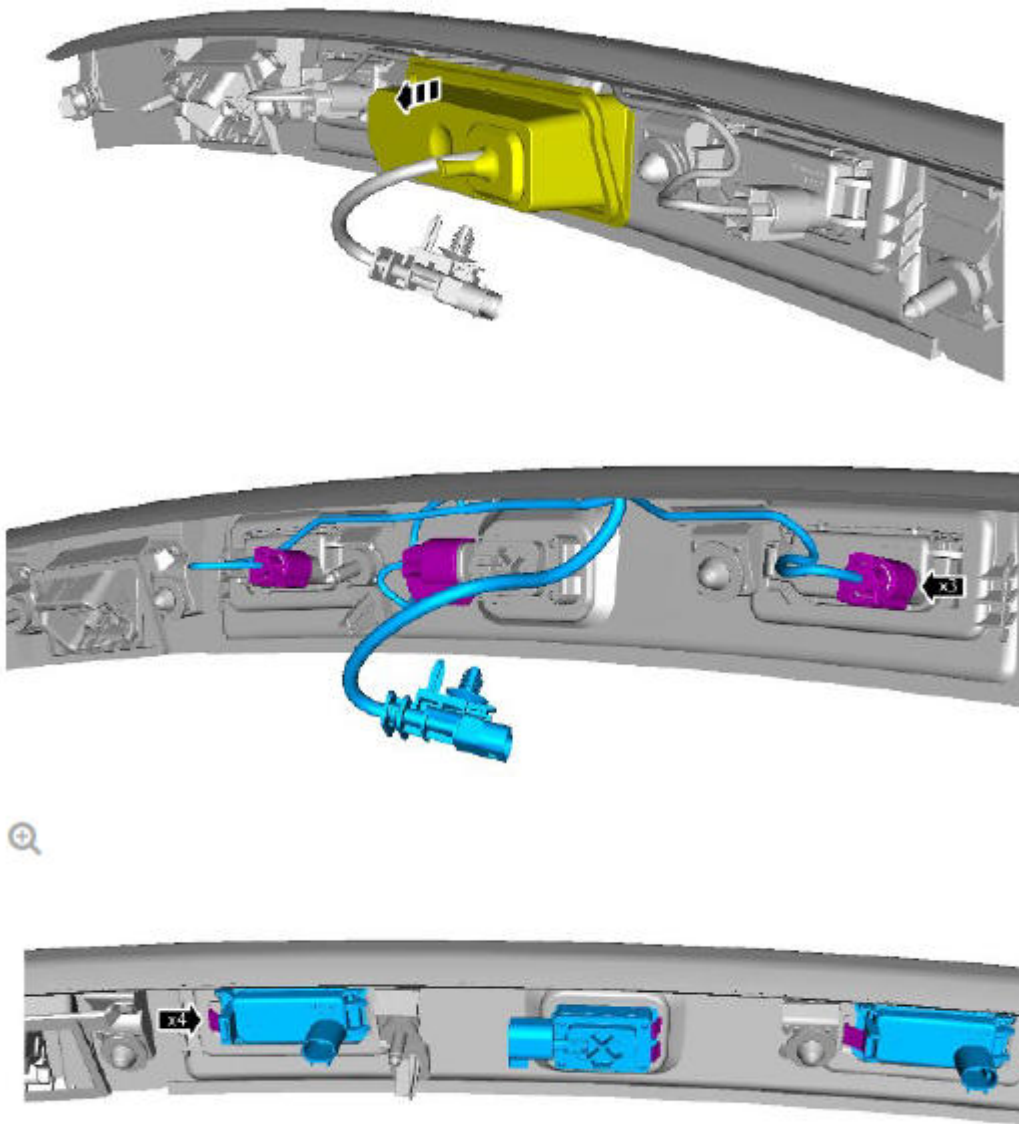

INSTALLATION

1. To install, reverse the removal procedure.

Exterior trim and ornamentation specifications

Torque Specifications

ITEM	NM	LB-FT	LB-IN
Rear spoiler ground cable retaining bolt	10	-	89
Rear spoiler retaining nuts	7	-	62

ne

Exterior Trim and Ornamentation Rocker Panel Moulding (G1785265) / Removal and installationFrame and mounting

ne
